


PULVERISER FRONT - REAR

KL 150



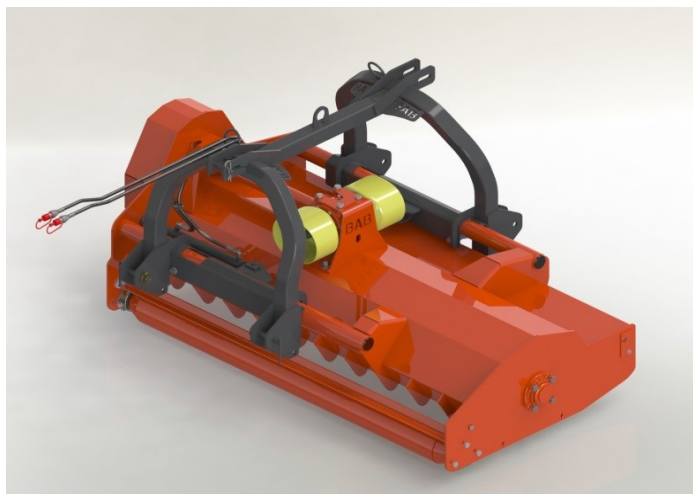


standard machine

- * low profile design front or rear mounted
- * \varnothing 180 mm rotor tube with shaft ends \varnothing 50 mm
- * outside diameter flails 440 mm
- * high speed rotor
- * chassis 6/10 mm with internal counter hooks
- * automatic belt tensioner
- * 4 or 5 V-belts SPB section depending on cutting size
- * hydraulic offset with linear guidance standard
- * 3-point linkage cat II , \varnothing 28/25 mm
- * gearbox 540 rpm with double PTO entrance
- * heavy duty flail 2,2 kg with fixing bolt M20
- * included drive-shaft
- * rear roller \varnothing 140 mm

different models available

art. nr.	type-model	cutting cm	total width cm	flails #	V-belts #	weight kg	price €
160-050-140	KL140-150	145	165	10	3		
160-050-160	KL160-150	165	185	10	4		
160-050-180	KL180-150	185	205	12	4	630	
160-050-200	KL200-150	205	230	12	5	690	

options

160-095-001	1	skids				
160-095-002	2	1000 rpm instead of 540 rpm				
150-001-001	3	single brush to built on right side of frame				
160-095-005	4	rear roller \varnothing 220				
	5	gearbox with independent rotation direction			(= model 152)	
160-095-007	6	mirror version				

17-mei-21