

## standard sprayer

# MOS

## single

pump \* diaphragmpump 140 liter COMET

mixing \* dust hydraulic mixer in basket  
\* injector met venturi

axle \* 60 mm width adjustable track

wheels \* tyres 380/55-17 Flotation 12 ply

fans \* **single ø 900 mm with A-frame : pic 1**  
\* 2 speed gearbox with idle overdrive



nozzles \* double brass nozzle holders with Albus ATR nozzle

filters \* 1 suction filter, 50 mesh , easy to reach - adjusted to pump flow  
\* 2 high pressure filters, 50 or 80 mesh, in backside

control \* 2 elektrovalves , 27 watt

pres. control \* manuel

pres.gauge \* gauge 25 bar ø 100 mm class 1.0


tank \* polyethyleen tank 2000 liter  
\* clean water tank for cleaning pump  
\* clean water tank for washing hands

pto \* standard pto W400

hitch \* short turning hitch with double gearbox  
\* equipped with hydraulic drawbar suspension

mower \* mower , cutting size 200 - 220 or 240 cm  
\* full mechanical driven without V-belts and mower can be disengaged  
\* runs on 3 metal rollers ø 220 mm in front and rear  
\* floating mounted and easy to dismantle

general \* metallized frame  
\* lights for road traffic

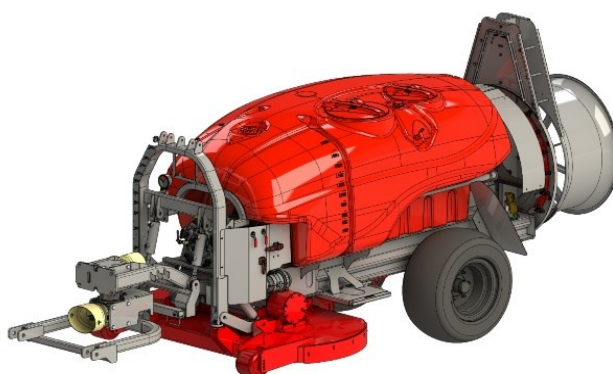

pic 1

15-mei-21

## options

*pump* \* high-pressure , slow turning piston pump BAB 80 liter  
\* brass diaphragmpump AR 135 liter

*mixing* \* 2nd pump (centifugal) for mixing in tank , hydr. driven by tractor

*wheel axle* \* braked axle

*wheels* \* banden 350/50-16 12 ply

*tower* \* **triprop 290 cm** 3x ø 560 mm with 2 x 9 nozzles  
\* **quatt 370 cm** 4x ø 560 mm with 2 x 12 nozzles  
\* **turblo** 2x ø 800/12 with 2 x 11 nozzles

*nozzles* \* triple nozzle bodies with Albus ATR stuk  
\* drift reducing nozzle Albus TVI  
\* double spray boom , front and rear

*control* \* 4 sections instead of 2 with 2 additional electrovalves a pair  
\* spraycomputer Farmscan

*pres. Control* \* elektrical pressure regulation valve

