

## MOWER S mow-spray



### standard machine

- \* built low
- \* height adjustable skids in front
- \* height adjustable roller ø 140 mm in back
- \* three point linkage cat II ø 25- 28 mm
- \* 2 rotors with swinging blades
- \* discharges grass left and right
- \* 540 rpm
- \* floating hitch for sprayer
- \* pto drive shaft

| art. nr:    | type         | cutting<br>cm | total<br>cm | frame<br>mm | rotor<br># | blades<br># | weight<br>kg | price |
|-------------|--------------|---------------|-------------|-------------|------------|-------------|--------------|-------|
| 880-505-162 | <b>S162S</b> | 160           | 170         | 5           | 2          | 4           |              |       |
| 880-505-182 | <b>S182S</b> | 180           | 190         | 5           | 2          | 4           | 600          |       |
| 880-505-202 | <b>S202S</b> | 200           | 210         | 5           | 2          | 4           | 620          |       |
| 880-505-222 | <b>S222S</b> | 220           | 230         | 5           | 2          | 4           |              |       |
| 880-505-242 | <b>S242S</b> | 240           | 250         | 5           | 2          | 4           |              |       |
| 880-505-262 | <b>S262S</b> | 260           | 270         | 6           | 2          | 4           |              |       |
| 880-505-282 | <b>S282S</b> | 280           | 290         | 6           | 2          | 4           | 930          |       |

### options:

1

heavy duty metal front rollers (pair)



2

removable side plates for side discharge




3

height adjustable roller ø 220 mm in back



4

trailed spray-mow combination  
SG version

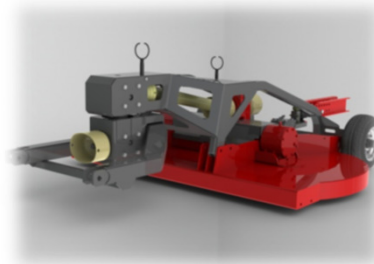

5

grass discharge in the middle

01-dec-21