


MOWER S-A adjustable cutting width mow-spray

standard machine

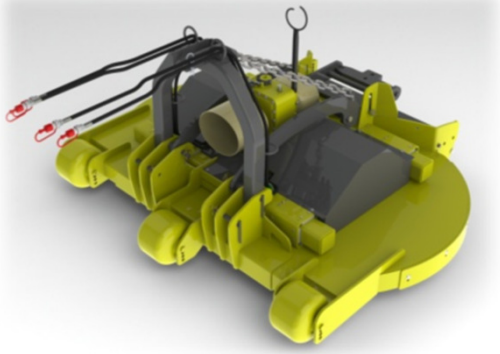

- * built low - removable side plates
- * height adjustable heavy duty metal front rollers \varnothing 220 mm
- * height adjustable roller \varnothing 140 mm in back
- * three point linkage cat II \varnothing 25 - 28 mm
- * 2 rotors with swinging blades
- * discharges grass left and right
- * 540 rpm
- * floating hitch for sprayer
- * pto drive

* adjustable cutting width left and right independent

art. nr.	type	cutting min/max cm	total closed cm	frame mm	rotor #	blades #	weight kg	price
880-516-182	S182AS	180 - 230	190	5	2	4		
880-516-202	S202AS	200 - 250	210	5	2	4		
880-516-222	S222AS	220 - 270	230	5	2	4	950	
880-516-242	S242AS	240 - 290	250	5	2	4		

option:



880-550-003 height adjustable roller \varnothing 220 mm

SG202AS	trailed mow-spray with adjustable cutting size	1300
SG222AS		1380
SG242AS		



01-dec-21