


## Hydraulic front sweeper

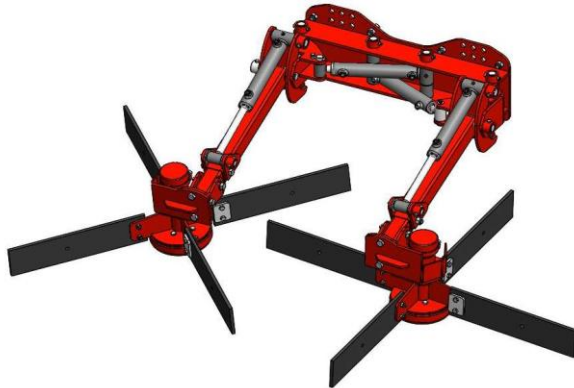

The sweeper is meant to be used as a frontmachine.

It can be connected with the 3-point linkage in the front or built fix to the tractor

The front mounting gives a better overview of the machine and its operation.

Also because the rotors are large,  $\varnothing$  120 cm, and the operating angle can be adjusted, this results in a good working of the machine.

The rotors are also equipped with four double rubber flaps.

All this together, good visibility, large rotor, double flaps and working angle,

this results in a device that ensures a neat black strip in just 1 pass.

The working width is hydraulic adjustable, left and right seperatly from 2,5 to 4 meter.

### HYDRAULIC FRONT SWEEPER

#### *standard machine*

mounting fix or 3-point linkage

left and right width adjustable seperatly

completly foldable for road tranport

nice overview of machine

max working width 4 meter

#### *options*

electric control

manuel valve bloc

fix mounting on front of tractor

01-dec-23