

CUTTER R3

The grass cutter type R3 is a new design by BAB

This new serie of cutters is mainly focused on the wider working widths

The dimensions of the working width range from 260 cm up to and including 350 cm.

A compact design is created by using 3 rotors instead of 2.


The gearboxes are on 1 line and have a fixed driveline. Each gearbox has his own rotor.

There is chosen for a large overlap of 2x 5 cm. The design and production of the gearboxes is all done by BAB. These gearboxes are designed for 100 hp.

On the backside of the gearbox is a big showglass to verify quick and easy

the oil level. The frame is made out of steel, with 6, 8 and 12 mm of thickness.

On the backside the cutter has a wide roller with \varnothing 220 mm. This roller is equipped with a double bearing and a special dirt seal.

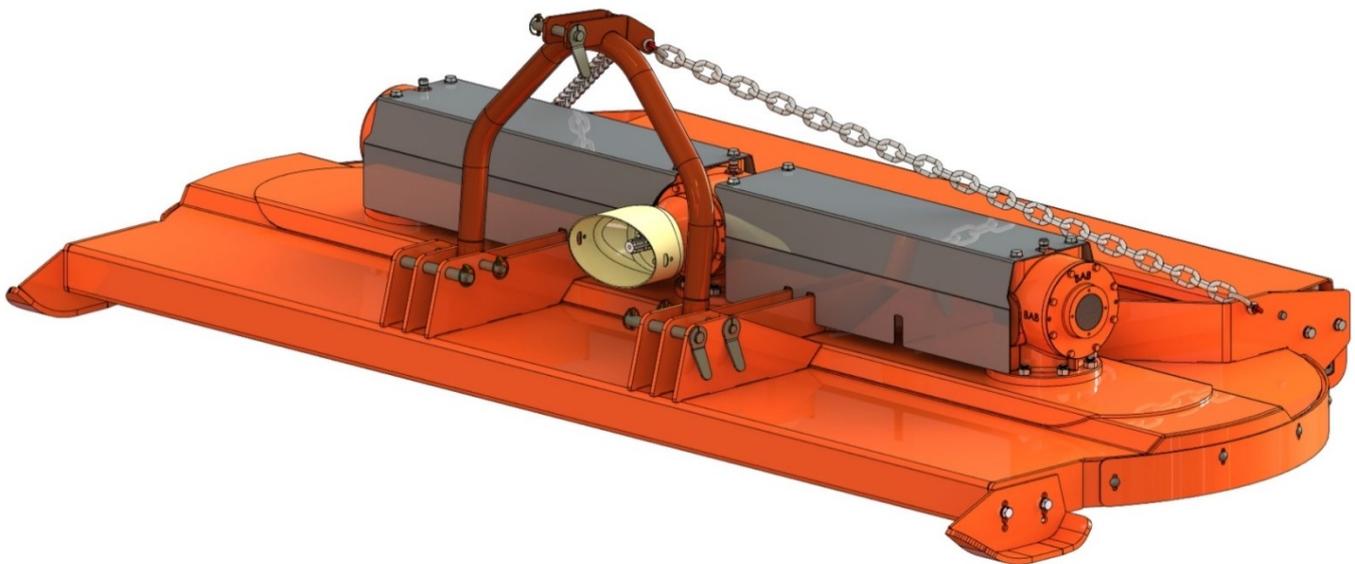

standard machine

- * low construction
- * skids in front side
- * rear roller \varnothing 220 mm
- * linkage cat II \varnothing 25- 28 mm
- * fixe drive line
- * 3 rotors , 3x left turning
- * rotor with swinging blades
- * grass discharge on left side
- * height adjustable
- * 750 - 1000 rpm
- * pto drive shaft with clutch



nr:	type	cutting: cm	total: cm	frame mm	rotor #	blade #	weight kg	price €
882-500-263	R263	260	270	6	3	6		
882-500-293	R293	290	300	6	3	6	900	
882-500-323	R323	320	330	6	3	6	1050	
882-500-353	R353	350	360	6	3	6		

options

1

metal rollers in front



2

side top open



3

frame 8 mm (+100 kg)
instead of 6 mm

4

signalisation
for road traffic
left and right

